

## ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Saint-Gobain Sweden AB, Weber floor
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-2291-1047-EN
Registration number:	NEPD-2291-1047-EN
ECO Platform reference number:	-
Issue date:	09.07.2020
Valid to:	09.07.2025

### weberfloor 4040 combi rapid DR

Saint-Gobain Sweden AB, Weber floor



[www.epd-norge.no](http://www.epd-norge.no)



## General information

**Product:**

weberfloor 4040 combi rapid DR

**Owner of the declaration:**

Saint-Gobain Sweden AB, Weber floor  
 Contact person: Anders Anderberg  
 Phone: +46 8 625 6105  
 e-mail: anders.anderberg@weber.se

**Program operator:**

The Norwegian EPD Foundation  
 Pb. 5250 Majorstuen, 0303 Oslo  
 Phone: +47 23 08 80 00  
 e-mail: [post@epd-norge.no](mailto:post@epd-norge.no)

**Manufacturer:**

Saint-Gobain Sweden AB, Weber floor

**Declaration number:**

NEPD-2291-1047-EN

**Place of production:**

Saint-Gobain Sweden AB, Weber, Vingåker

**ECO Platform reference number:**
**Management system:**

ISO 9001, ISO 14001

**This declaration is based on Product Category Rules:**

CEN Standard EN 15804:2012+A1:2013 serves as core PCR.

**Organisation no:**

SE-556241-2592

**Statement of liability:**

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

**Issue date:** 09.07.2020

**Valid to:** 09.07.2025

**Declared unit:**

1 kg weberfloor 4040 combi rapid DR

**Year of study:**

2019

**Declared unit with option:**

A1,A2,A3,A4,A5

**Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

**Functional unit:**
**Author of the Life Cycle Assessment:**

The declaration is developed using eEPD v4.0 from LCA.no  
 Approval:  
 Company specific data are:

Collected/registered by: Thomas Flycht

Internal verification by: Helene Wallgren

**Verification:**

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4

External

Third party verifier:

Sign




Senior Research Scientist, Anne Rønning

(Independent verifier approved by EPD Norway)

**Approved:**

Sign



Håkon Hauan

Managing Director of EPD-Norway

# Product

## Product description:

Weberfloor 4040 combi rapid DR is a dust reduced, fine smoothing compound with paste consistence for fine filling and repairs of concrete, particle board, stone, ceramics, and gypsum plasterboard internally in buildings. It can be used on floors, walls and ceilings in housing, offices and public areas indoors. It is suitable as underlayment for most surface coverings such as tiles, vinyl flooring, linoleum flooring and floating parquetry.

## Product specification

The composition of the product is described in the following table:

Materials	%
Binder	20-50
Aggregate	20-50
Filler	5-35
Additives	2-5

## Technical data:

weberfloor 4040 combi rapid DR fine is designed, produced and CE marked according to EN 13813

For further information, see [www.se.weber/](http://www.se.weber/)

## Market:

Scandinavian countries

## Reference service life, product

> 50 years

## Reference service life, building

> 50 years

# LCA: Calculation rules

## Declared unit:

1 kg weberfloor 4040 combi rapid DR

## Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

## Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Binder	EPD-BVG-20140073-IAG1-EN	EPD	2014
Additives	ecoinvent 3.4	Database	2017
Aggregate	ecoinvent 3.4	Database	2017
Filler	ecoinvent 3.4	Database	2017
Packaging	ecoinvent 3.4	Database	2017
Packaging	Modified ecoinvent 3.4	Database	2017
Additives	ecoinvent 3.5	Database	2018
Binder	ecoinvent 3.5	Database	2018

## Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

**System boundary:**

All processes from raw material extraction to product transport to the construction site and assembly are included in the analysis (A1-A5). The flow chart below illustrates the system boundaries for the A1 to A3 part of the analysis.

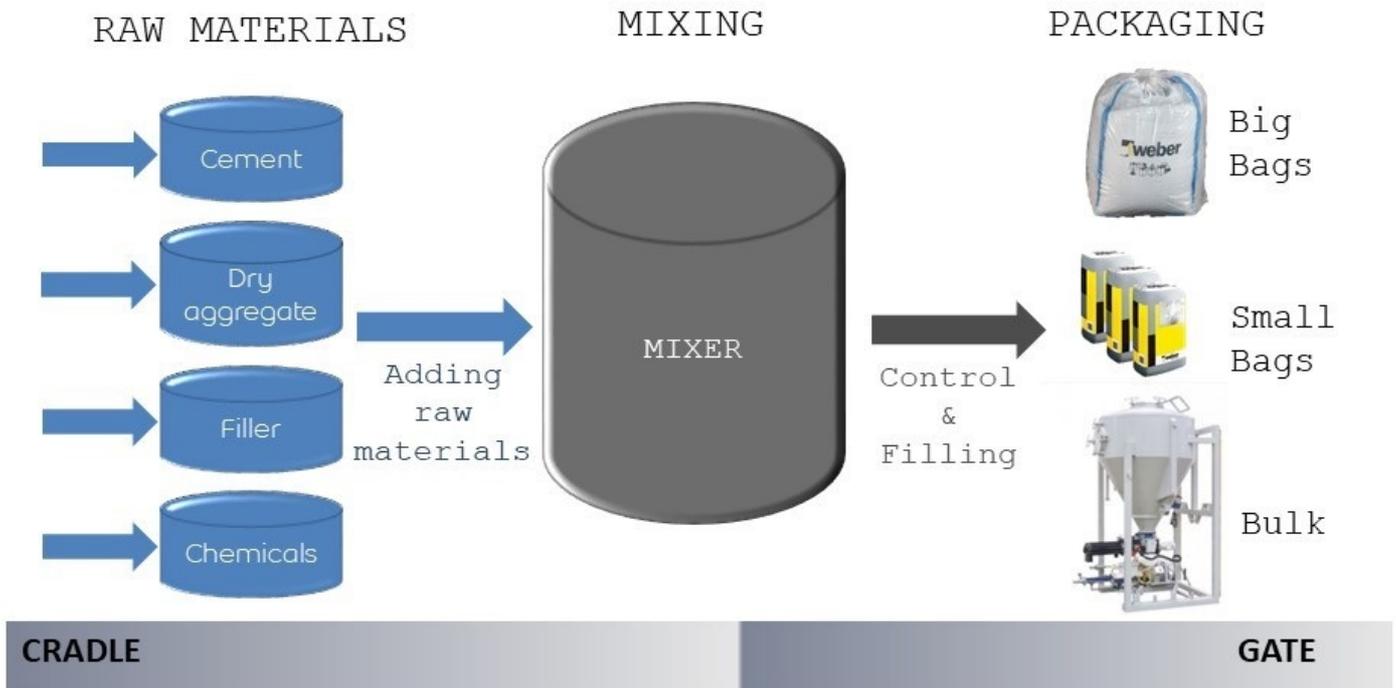

**Additional technical information:**

The product is P-labeled by Research Institute of Sweden.

The consumption of the product is 1,55 kg / m<sup>2</sup> / mm.

The remaining powder and cured material may be disposed as construction waste to disposal or recycling.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to market (A4) is calculated based on the default distance of 300 km from NPCR 010

### Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck	55,0 %	Truck, lorry over 32 tonnes, EURO 5	300	0,022823	l/tkm	6,85
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

### Assembly (A5)

	Unit	Value
Auxiliary	kg	
Water consumption	m <sup>3</sup>	0,0002
Electricity consumption	kWh	0,0020
Other energy carriers	MJ	
Material loss	kg	
Output materials from waste treatment	kg	0,0056
Dust in the air	kg	
VOC emissions	kg	

## LCA: Results

### System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage					Construction installation stage	User stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	

### Environmental impact

Parameter	Unit	A1-A3	A4	A5
GWP	kg CO <sub>2</sub> -eq	4,55E-01	2,62E-02	1,73E-04
ODP	kg CFC11 -eq	2,59E-08	5,10E-09	1,02E-10
POCP	kg C <sub>2</sub> H <sub>4</sub> -eq	8,80E-05	4,23E-06	5,01E-08
AP	kg SO <sub>2</sub> -eq	1,72E-03	8,51E-05	9,20E-07
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq	2,75E-04	1,43E-05	1,69E-07
ADPM	kg Sb -eq	2,97E-06	5,91E-08	1,43E-09
ADPE	MJ	5,74E+00	4,11E-01	1,64E-03

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0\*10<sup>-3</sup> = 0,009

\*INA Indicator Not Assessed

### Remarks to environmental impacts

The product contains no substances given by the REACH Candidate list.

## Resource use

Parameter	Unit	A1-A3	A4	A5
RPEE	MJ	1,06E+00	7,42E-03	5,70E-03
RPEM	MJ	5,32E-01	0,00E+00	0,00E+00
TPE	MJ	1,59E+00	7,42E-03	5,70E-03
NRPE	MJ	6,16E+00	4,23E-01	1,40E-02
NRPM	MJ	3,55E-02	0,00E+00	0,00E+00
TRPE	MJ	6,20E+00	4,23E-01	1,40E-02
SM	kg	8,32E-02	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	5,34E-06
NRSF	MJ	2,04E-01	0,00E+00	0,00E+00
W	m <sup>3</sup>	3,75E-03	9,98E-05	2,84E-04

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$

\*INA Indicator Not Assessed

## End of life - Waste

Parameter	Unit	A1-A3	A4	A5
HW	kg	5,04E-05	2,25E-07	8,34E-09
NHW	kg	1,06E-01	3,84E-02	1,44E-04
RW	kg	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$

\*INA Indicator Not Assessed

## End of life - Output flow

Parameter	Unit	A1-A3	A4	A5
CR	kg	0,00E+00	0,00E+00	0,00E+00
MR	kg	5,26E-05	0,00E+00	0,00E+00
MER	kg	3,00E-04	0,00E+00	5,60E-03
EEE	MJ	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$

\*INA Indicator Not Assessed

## Additional Norwegian requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Renewable electricity with Guarantee of Origin from LOS (kWh)	Modified ecoinvent 3.4	60,20	g CO <sub>2</sub> -ekv/kWh

### Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

### Indoor environment

The product meets the requirements for low emissions and odour (M1) by EN15251: 2007 Appendix E

## Bibliography

- ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.  
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.  
 EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.  
 ISO 21930:2017 Sustainability in buildings and civil engineering works. Core rules for environmental product declarations of construction products.  
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.  
 Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system, LCA.no report number 04.18  
 Iversen et al., (2019) EPD generator for Saint-Gobain Weber and Scanspac - Background information and LCA data, LCA.no report number 05.18  
 NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

 <b>epd-norge.no</b> The Norwegian EPD Foundation	<b>Program operator and publisher</b> The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo 0303 Oslo Norway	Phone: +47 23 08 80 00  e-mail: <a href="mailto:post@epd-norge.no">post@epd-norge.no</a> web: <a href="http://www.epd-norge.no">www.epd-norge.no</a>
	<b>Owner of the declaration</b> Saint-Gobain Sweden AB, Weber floor Box 415 SE-19162 Sollentuna	Phone: +46 8 625 6105 Fax: e-mail: <a href="mailto:anders.anderberg@weber.se">anders.anderberg@weber.se</a> web: <a href="http://www.weber.se">www.weber.se</a>
	<b>Author of the Life Cycle Assessment</b> LCA.no AS Dokka 1C 1671 Kråkerøy	Phone: +47 916 50 916 Fax: e-mail: <a href="mailto:post@lca.no">post@lca.no</a> web: <a href="http://www.lca.no">www.lca.no</a>
	<b>Developer of EPD generator</b> LCA.no AS Dokka 1C 1671 Kråkerøy	Phone: +47 916 50 916  e-mail: <a href="mailto:post@lca.no">post@lca.no</a> web: <a href="http://www.lca.no">www.lca.no</a>